

# TOPTER

Interlocked socket-outlets in **technopolymer** for standard applications

## Safe

The switch, which can be padlocked with up to 2 padlocks, prevents any unauthorised operation and ensures maximum protection.

## Reliable

The AC3-AC23A switch withstands high loads and can be fitted with **two auxiliary contacts** for remote signalling.

## Robust

The socket is integrated into the body without the use of screws. In the fuse equipped version, the **shatterproof cover** releases if forced open, protecting the integrity and longevity of the product.



Customer focused operations  
Smart engineering  
Top manufacture  
Service excellence



Palazzoli S.p.a  
Via F. Palazzoli, 31 - 25128 Brescia - Italy  
Tel. +39 030 2015.1  
palazzoli.com



**Palazzoli**  
SISTEMI ELETTRICI E LUCE D'AUTORE

# TAIS & TOPTER

Freedom of choice

AMAS5616E



ELECTRICAL SYSTEMS

# TAIS

Interlocked socket-outlets in Palazzoli **thermosetting GRP** for heavy-duty

## Everlasting

Palazzoli thermosetting GRP resin is flame resistant, does not spread flames and does not emit toxic gases. UV-resistant, chemical resistant, ensuring total protection and long-lasting performance.

## Extreme

The **ceramic fuse holder base** withstands high temperatures without warping and maintains stability even in the event of overloads or overheating.

## Solid

The **steel interlock** and the rated current isolator AC3-AC23A switch ensure reliability and operational continuity.



**Palazzoli**

# TAIS

Interlocked socket-outlets in **thermosetting GRP**

		IP66/67/69			
		DIRECT		FUSES	
M95 top entry M25	16A	230V	2P+⊕	470126	472620
		400V	3P+⊕	470136	472730
			3P+N+⊕	470146	472830
	32A	24V	2P 150VA	-	469873*
		230V	2P+⊕	469226	468226
		400V	3P+⊕	469236	468236
M125 entry M32	32A	400V	3P+N+⊕	470246	472831
	63A	400V	3P+⊕	470336	472732
3P+N+⊕			470346	472832	
M250 entry M32	125A	400V	3P+⊕	480436	482436
			3P+N+⊕	480446	482446

\* Self-protected transformer, no fuses required

		IP66/67/68/69
		FIXED
flange dimensions 65x83		773126
		773136
		773146
		-
flange dimensions 100x108		773226
		773236
		773246
flange dimensions 114x114		773336
		773346



Complete TAIS range

## TAIS

<b>Range</b>	From 16A to 125A
<b>Enclosure material</b>	Palazzoli thermosetting GRP resin GWT 960°C
<b>Protection rating</b>	IP66/IP67/IP69
<b>Impact resistance</b>	IK10
<b>Switch</b>	AC3-AC23A rated current with 2 optional auxiliary status contacts (integrated contact holder)
<b>Fuse holder</b>	Toggle-type ceramic base for cylindrical fuses 16A-32A - 10.3x38; 63A - 22x58; 125A - NH00
<b>Padlockable handle</b>	3 padlocks up to 8 mm
<b>Interlock mechanism</b>	Steel
<b>Ambient operating temperature</b>	-30°C ÷ +60°C
<b>Socket</b>	Made of heavy-duty technopolymer GWT 960°C



Complete TOPTER range

## TOPTER

<b>Range</b>	From 16A to 63A
<b>Enclosure material</b>	Technopolymer GWT 650°C
<b>Protection rating</b>	IP66/IP67
<b>Impact resistance</b>	IK08
<b>Switch</b>	AC3-AC23A rated current with 2 optional auxiliary status contacts (with kit 579851)
<b>Fuse holder</b>	Technopolymer drawer-type base for cylindrical fuses 16A-32A - 10.3x38; 63A - D02
<b>Padlockable handle</b>	2 padlocks up to 8 mm
<b>Interlock mechanism</b>	Technopolymer
<b>Ambient operating temperature</b>	-25°C ÷ +50°C
<b>Socket</b>	Made of technopolymer for standard applications GWT 850°C


# TOPTER

Interlocked socket-outlets in **technopolymer**

		IP66/67			
		DIRECT		FUSES	
socket dimensions 103x230	16A	230V	2P+⊕	491126	490126
		400V	3P+⊕	491136	490136
			3P+N+⊕	491146	490146
	32A	24V	2P 150VA	-	490024*
		230V	2P+⊕	491226	490226
		400V	3P+⊕	491236	490236
socket dimensions 115x290	63A	400V	3P+N+⊕	491246	490246
			3P+⊕	481336**	480336**
			3P+N+⊕	481346**	480346**


\* Self-protected transformer, no fuses required  
\*\* IP65 protection rating

### Boxes and plates for building distribution boards from 16A to 63A

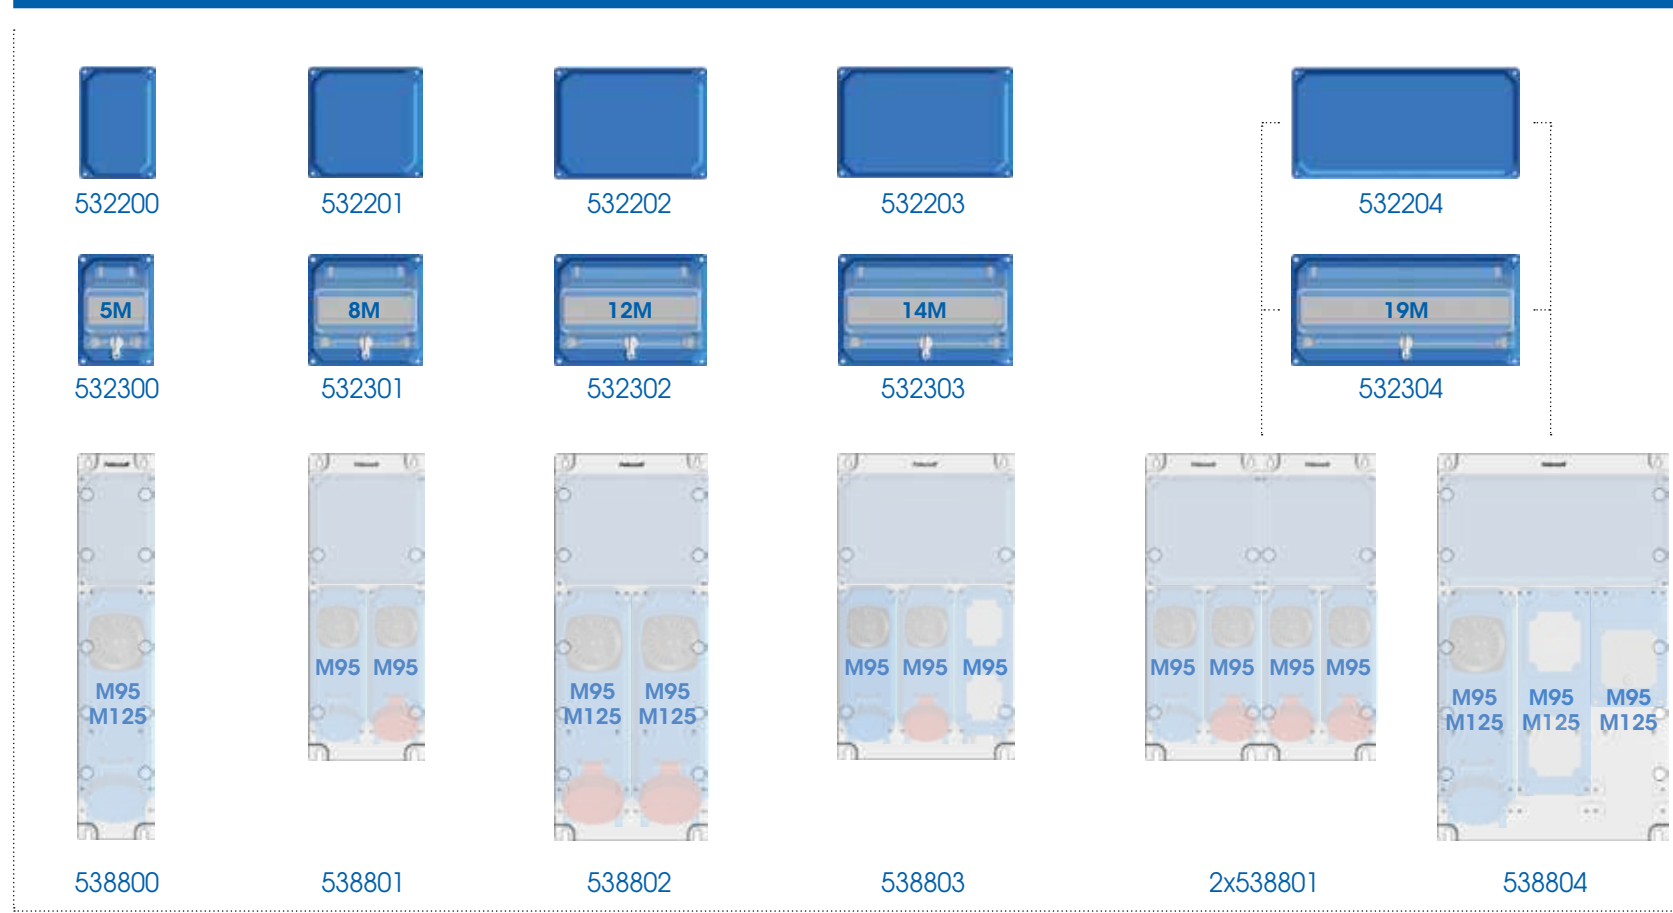


Connectors for connecting sockets and boxes	538425 (M25) 538432 (M32)
Auxiliary contact for switch status	270331 (1 NO) 270332 (1 NO+1 NC)


### Boxes for fixed sockets and Schuko covers

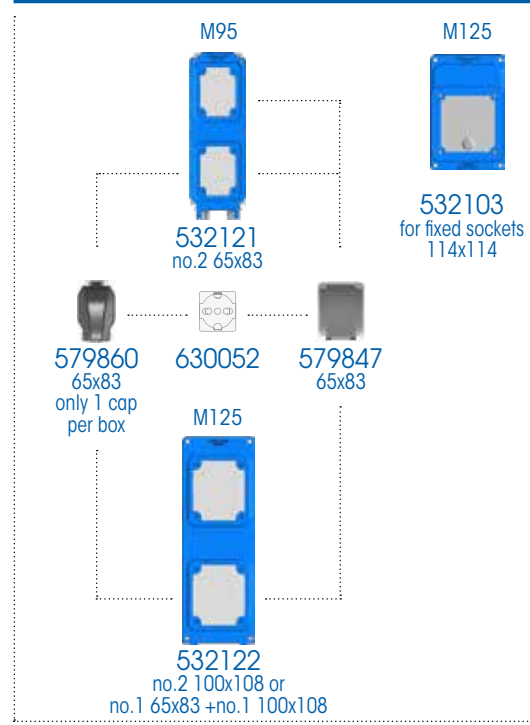


### Flange plates for Schuko sockets and covers

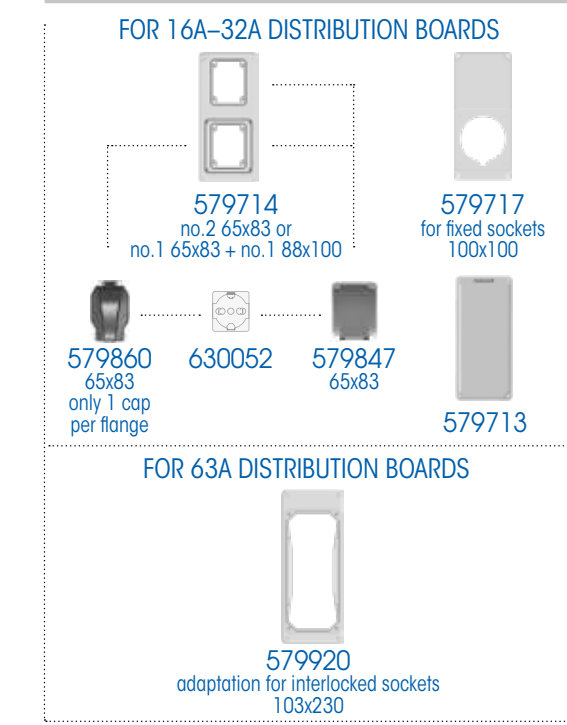

### 16A-32A distribution boards and enclosures

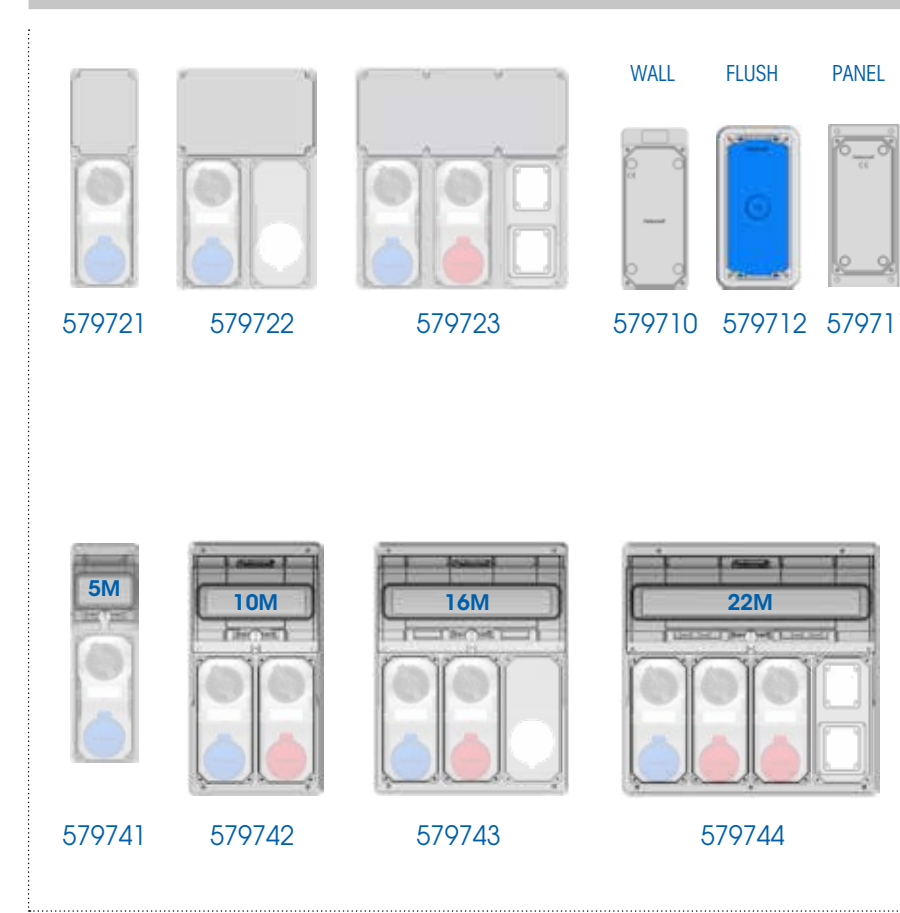

### 63A distribution boards and enclosures

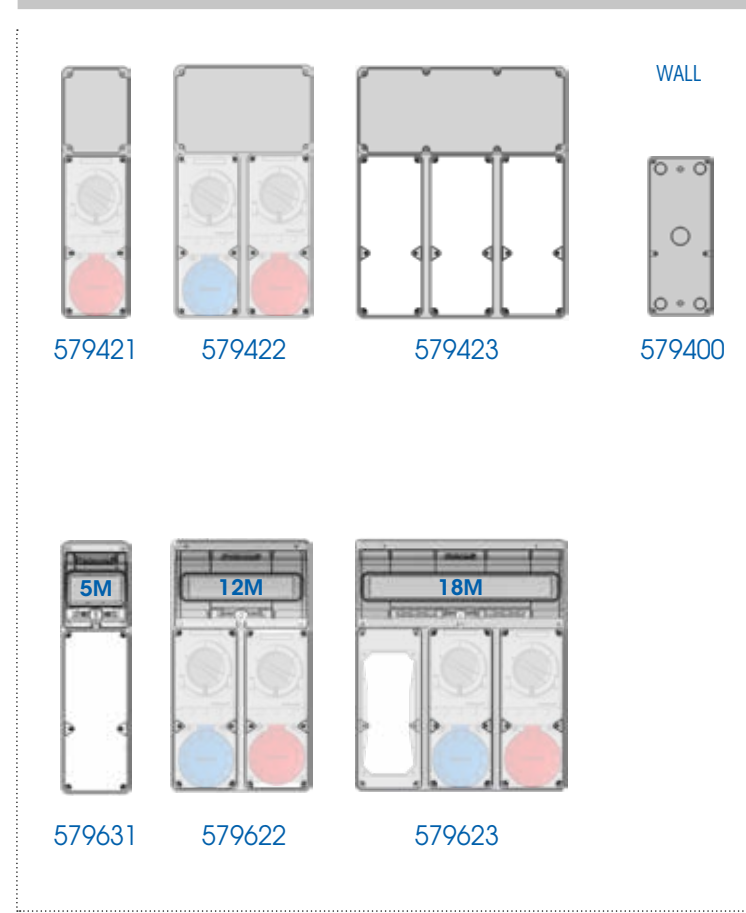

Auxiliary contact support for switch status	579851	Auxiliary contact plug inserted	579850	Coupling for panel mounting	580250 (Pg 21)
Auxiliary contact for switch status	270331 (1 NO) 270332 (1 NO+1 NC)	Suitable for interlocked and fixed sockets			